


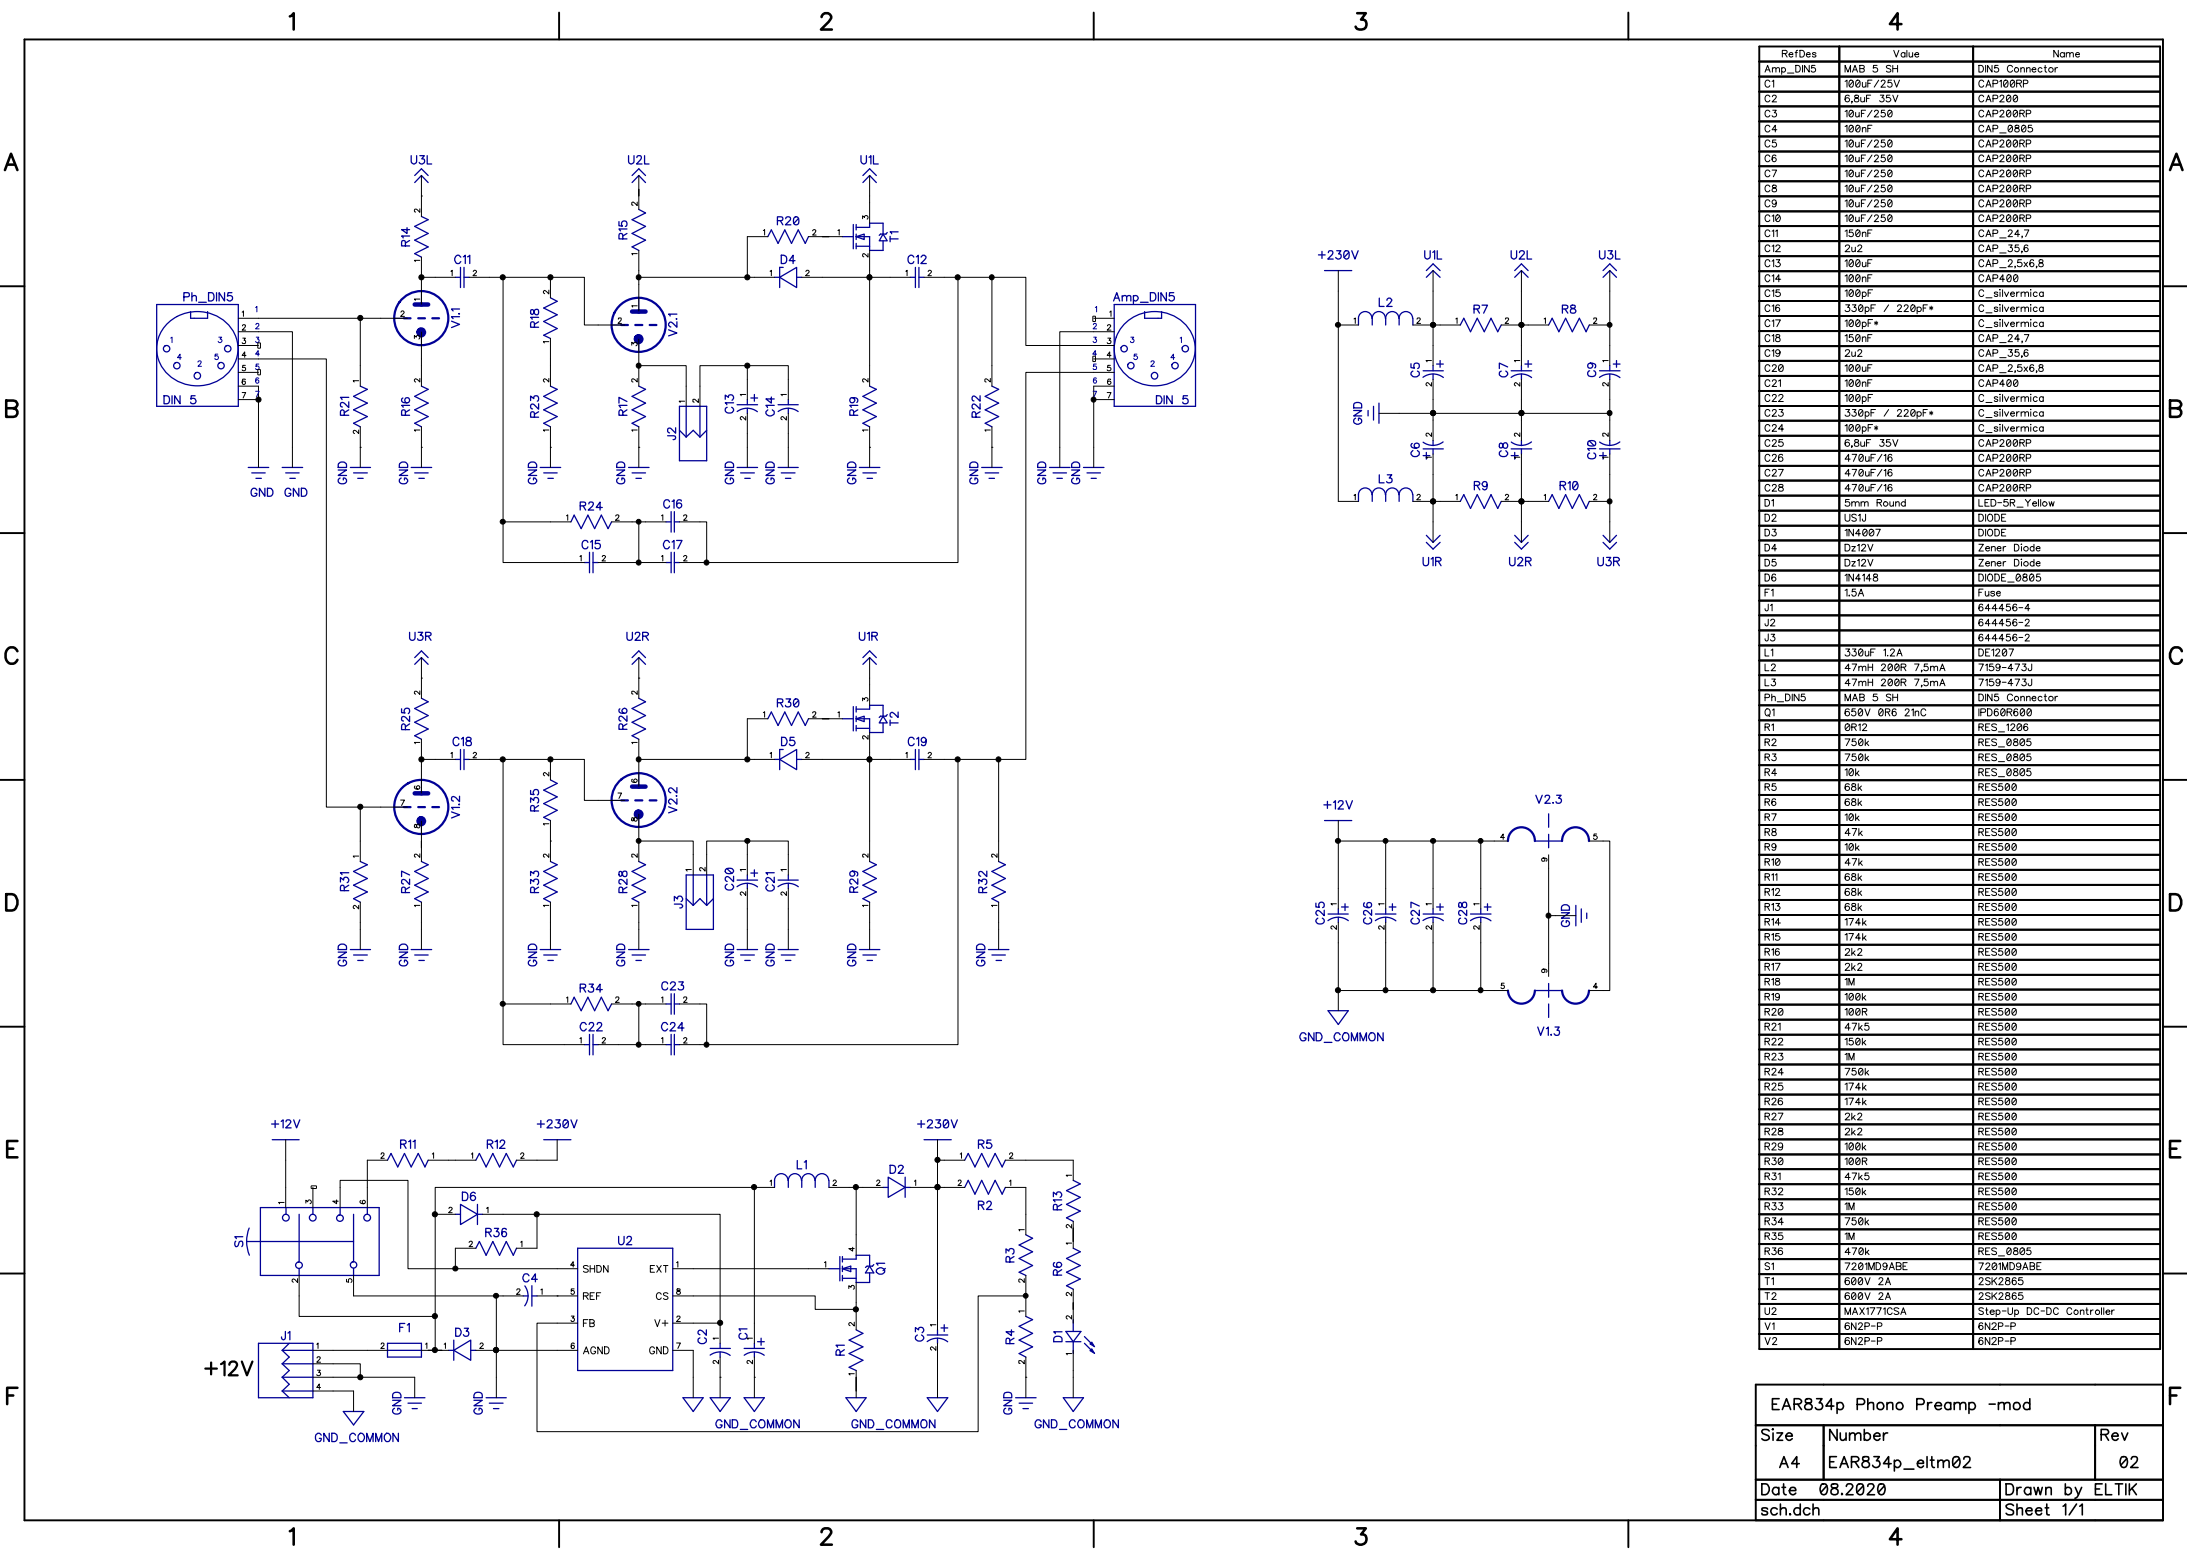

RefDes	Value	Name
Amp_DIN5	MAB 5 SH	DIN5 Connector
C1	100uF /25V	CAP1000P
C2	6.8uF /35V	CAP200R
C3	10uF /250	CAP200RP
C4	100nF	CAP_0005
C5	10uF /250	CAP200RP
C6	10uF /250	CAP200RP
C7	10uF /250	CAP200RP
C8	10uF /250	CAP200RP
C9	10uF /250	CAP200RP
C10	10uF /250	CAP200RP
C11	150nF	CAP_24,7
C12	2u2	CAP_35,6
C13	100uF	CAP_2,5x6,8
C14	100nF	CAP400
C15	100pF	C_silvermica
C16	330pF / 220pF*	C_silvermica
C17	100pF*	C_silvermica
C18	150nF	CAP_24,7
C19	2u2	CAP_35,6
C20	100uF	CAP_2,5x6,8
C21	100nF	CAP400
C22	100pF	C_silvermica
C23	330pF / 220pF*	C_silvermica
C24	100pF*	C_silvermica
C25	6.8uF /35V	CAP200RP
C26	470uF /16	CAP200RP
C27	470uF /16	CAP200RP
C28	470uF /16	CAP200RP
D1	5mm Round	LED-5R_Yellow
D2	US1J	DIODE
D3	1N4007	DIODE
D4	Dz12V	Zener Diode
D5	Dz12V	Zener Diode
D6	1N4148	DIODE_0005
F1	1.5A	Fuse
J1	644456-4	
J2	644456-2	
J3	644456-2	
L1	330uF 1.2A	DET107
L2	47mH 200R 7.5mA	7159-473J
L3	47mH 200R 7.5mA	7159-473J
Ph_DIN5	MAB 5 SH	DIN5 Connector
Q1	650V 0R6 21nC	IPD60R600
R1	0R12	RES_1206
R2	750k	RES_0005
R3	750k	RES_0005
R4	10k	RES_0005
R5	68k	RES500
R6	68k	RES500
R7	10k	RES500
R8	47k	RES500
R9	10k	RES500
R10	47k	RES500
R11	68k	RES500
R12	68k	RES500
R13	68k	RES500
R14	174k	RES500
R15	174k	RES500
R16	2k2	RES500
R17	2k2	RES500
R18	1M	RES500
R19	100k	RES500
R20	100R	RES500
R21	47k5	RES500
R22	150k	RES500
R23	1M	RES500
R24	750k	RES500
R25	174k	RES500
R26	174k	RES500
R27	2k2	RES500
R28	2k2	RES500
R29	100k	RES500
R30	100R	RES500
R31	47k5	RES500
R32	150k	RES500
R33	1M	RES500
R34	750k	RES500
R35	1M	RES500
R36	470k	RES_0005
S1	7201MD9ABE	7201MD9ABE
T1	600V 2A	2SK2865
T2	600V 2A	2SK2865
U2	MAX1771CSA	Step-Up DC-DC Controller
V1	6N2P-P	6N2P-P
V2	6N2P-P	6N2P-P

EAR834p Phono Preamp -mod		
Size	Number	Rev
A4	EAR834p_eltm02	02
Date	08.2020	Drawn by ELTIK
sch.dch		Sheet 1/1